

Energy Saving Air Blowing Nozzle AIR BLASTER

Easy-to-Start

Carbon **Neutrality** Measures

High Blowing Force and Low Energy Consumption!



AB-1G with Gun


Energy Time-efficien

AB-1 Nozzle Unit

Performance comparison test

between other company's pin-point nozzle and GA-REW's Air Blaster Mini (AB-2)

Tested how many seconds it takes to drain a 200 x 150 mm mesh.

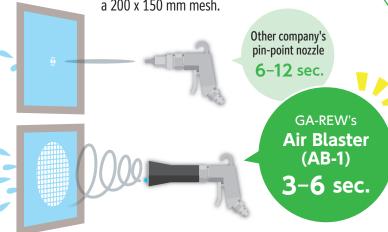

Compared to other company's pin-point nozzle,



- Air consumption is the same.
- · Air outlet size is the same.
- · Air pressure: 0.4 MPa

The operation time is drastically reduced to


The electricity bill is also less than

Energy-saving yet high-power!

Main Usage

- Dust removal before painting
- ► Removal of chips and emulsion after cutting
- Drying after washing, etc.

Difference between our Shock Gun Series

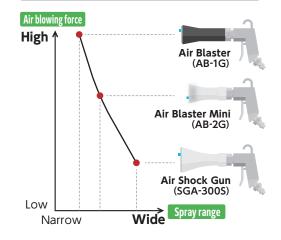

Name	Air Blaster	
Model No.	Nozzle Unit	with Gun
Туре	AB-1	AB-1G
Dimensions (mm)	W28 D142 H28	W28 D249 H155
Weight	50 grams	277 grams
Air Pressure	0.4 - 0.8MPa	
Air Flow Rate	200 liters/min. at 0.5 MPa	
Operating Temp.	10 - 50 °C (50 - 122 °F)	
Connection Part	R1/8	1/4 Male Coupler

GA-REW Co., Ltd.

E-mail: kaga@ga-rew.com / Website: https://www.ga-rew.com/en/ Telephone: +81 3 6765 0099 / Facsimile: +81 3 6762 0909 5-7-2-102, Nishiogi-kita, Suginami-ku, Tokyo 167-0042 Japan



Design and specification are subject to change without notice.

Please visit our website for the latest information.

October 2024

GA-REW **SEARCY**